

5

## PUMPING SYSTEM

TECHNICAL FIELD

10       The present invention relates to a pumping system.  
More specifically, the present invention relates to  
control of a variable-displacement vane pump or gear  
pump.

      Though reference is made in the following  
15 description to a variable-displacement vane pump, the  
teachings of the present invention may also be applied  
to advantage to a gear pump (not shown).

BACKGROUND ART

      As is known, vane pumps of the above type are  
20 currently used for pumping various fluids, such as  
lubricating oil in an internal combustion engine.

      In the present invention, operation of the pump is  
controlled by delivery pressure and a further parameter,  
e.g. oil temperature.

25       Pumping systems are known, in fact, which are  
controlled not only by the delivery pressure of the pump  
but also by oil temperature.

Two such control systems are described in US-5 800 131 and FR-2 825 419, in which a member sensitive to variations in oil temperature acts directly on the pump ring to vary the eccentricity, and therefore displacement, of the pump as a function of lubricating oil temperature. More specifically, eccentricity (and therefore displacement) of the pump is increased by the control system as a function of the increase in oil temperature, to meet higher oil demand by the internal combustion engine.

Existing control systems of this type, however, have not proved altogether satisfactory, by subjecting the ring to severe forces that are difficult to control.

#### DISCLOSURE OF INVENTION

It is therefore an object of the present invention to provide a straightforward hydraulic control for controlling a pump, e.g. a variable-displacement vane pump, as a function of delivery pressure and another engine operating parameter, such as oil temperature.

According to the present invention, there is provided a pumping system as claimed in Claim 1.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A non-limiting embodiment of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a prior-art system on which the system according to the present invention is based;

Figure 2 shows a first configuration of the system according to the present invention;

Figure 3 shows a second configuration of the Figure 2 system;

5        Figure 4 shows a third configuration of the Figure 2 system;

Figure 5 shows a fourth configuration of the Figure 2 system;

Figure 6 shows a graph illustrating control of the  
10    Figure 2-5 system.

#### BEST MODE FOR CARRYING OUT THE INVENTION

For a clear understanding of the present invention, reference will first be made to the known system in Figure 1, which is the object of the Applicant's  
15    International Application PCT/EP2004/052140, and on which the system according to the present invention is based.

Number 10 in Figure 1 indicates a variable-delivery vane pump forming part of a pumping system 100 which is  
20    the object of the Applicant's Italian Patent Application BO2003A000528.

Pump 10 comprises, in known manner, a main body 11 having a cavity 12, in which a ring 13 translates as explained in detail later on.

25        Ring 13 houses a rotor 14 having vanes 15, which are movable radially inside respective radial slots 16 formed in rotor 14, which in turn is rotated in the

direction indicated by arrow W (see below).

Main body 11 is closed by a cover not shown in the accompanying drawings.

In known manner, rotor 14 houses a shaft 17  
5 connected mechanically to rotor 14; and a floating ring  
18 surrounding shaft 17, and on which rest respective  
ends of vanes 15.

Shaft 17 therefore has a permanently fixed centre  
P1, and ring 13 a centre P2.

10 The distance P1P2 represents the eccentricity E of  
pump 10.

As is known, by varying eccentricity E, the  
delivery of pump 10 can be varied as a function of  
demand by a user device UT downstream from pump 10 (see  
15 below).

User device UT may be defined for example by an  
internal combustion engine (not shown).

As shown in Figure 1, ring 13 comprises a  
projection 19 housed partly inside a chamber 20; and a  
20 projection 21 housed partly inside a chamber 22.  
Projections 19 and 21 are located on opposite sides of  
centre P2 of ring 13, and have, respectively, a front  
surface A1 facing chamber 20, and a front surface A2  
facing chamber 22. For reasons explained later on,  
25 surface A2 is larger than surface A1 and, on the basis  
of theoretical calculations and experiments, must be 1.4  
to 1.7 times surface A1.

Chamber 22 also houses a spring 22a, which exerts a modest force on surface A2 to restore the control system to maximum eccentricity E when system 100 is idle.

In the Figure 1 embodiment, chambers 20 and 22 are  
5 formed in main body 11 of pump 10.

Main body 11 also comprises an oil inlet 23 from a tank 24, and an oil outlet 25 to user device UT.

A feed conduit 26, for supplying user device UT, extends from outlet 25.

10 As shown in Figure 1, a first portion of the oil supply to user device UT is diverted to chamber 20 along a conduit 27, and a second portion of the oil is supplied to chamber 22 along a conduit 28.

More specifically, the second portion in conduit 28  
15 is almost all supplied to chamber 22 along a conduit 28a and via a dissipating device 29, in which a calibrated pressure loss occurs when oil actually flows inside it.

Conduit 28 is connected by a conduit 28b to a valve  
30.

20 Valve 30 comprises a cylinder 31 housing a piston 32.

More specifically, as shown in Figure 1, piston 32 comprises a first portion 32a and a second portion 32b connected to each other by a rod 32c.

25 Whereas portions 32a and 32b have the same cross section as cylinder 31, rod 32c has a smaller cross section than cylinder 31.

An opening 33 is formed in cylinder 31 and connected hydraulically to chamber 22 by a conduit 34.

Conduit 28b substantially provides for picking up a delivery pressure signal in conduit 28, so as to act on  
5 the front surface A3 of portion 32a of piston 32. Alternatively, conduit 28b may pick up the pressure signal at a point within the lubricating circuit.

The dash line in Figure 1 shows the situation in which opening 33 is closed by second portion 32b.

10 As explained in more detail below, as soon as the delivery pressure ( $p_1$ ) increases as a result of an increase in rotation speed of pump 10, greater force is exerted on surface A3 and, on reaching the preload value of a spring 36, moves piston 32 to permit oil flow from  
15 conduit 34 through opening 33 and along a conduit 35 to tank 24.

At the start of conduit 35 and alongside valve 30, the oil is at atmospheric pressure ( $p_0$ ).

Piston 32 is stressed elastically by spring 36,  
20 which is suitably sized and designed to generate a force only allowing movement of piston 32 when the delivery pressure ( $p_1$ ) on surface A3 reaches a given value.

A return conduit 37 from user device UT to tank 24 completes pumping system 100.

25 In the known art, eccentricity E is normally regulated by diverting a portion of the oil supply to a chamber, in which the delivery pressure acts directly on

the ring. On the opposite side, the ring is subjected to an opposing elastic force generated by a spring, thus establishing the eccentricity  $E$  of the pump required to ensure the necessary oil pressure and flow to user  
5 device UT.

High rotation speed of shaft 17, and therefore of rotor 14 and vanes 15, however, has the effect of preventing complete fill of a number of cavities 15a, each located between two adjacent vanes 15. In actual  
10 fact, this does not depend solely on the high speed of rotor 14, but also on the temperature and chemical-physical characteristics of the oil.

Incomplete fill of cavities 15a has the side-effect of producing a force which acts in the direction  
15 indicated by arrow  $F_1$  in Figure 1.

As a result, the pressure to the user device is other than required, on account of this undesired force which, as stated, is substantially generated by incomplete oil fill of cavities 15a.

20 By way of a solution to the problem, an attempt has been made to disassociate control from these negative internal forces by providing the so-called "hydraulic control" shown in the present description.

As shown in Figure 1, if the delivery pressure ( $p_1$ )  
25 were present in both chambers 20 and 22, the fact, as stated, that surface  $A_2$  is greater than (preferably 1.4 to 1.7 times) surface  $A_1$  would produce a force in the

direction indicated by arrow F2, and which would compensate the force (arrow F1) produced by incomplete fill of cavities 15a. In which case, maximum eccentricity E would be achieved.

5       The result, however, would be no adjustment at all. To obtain the desired adjustment, therefore, the oil pressure (p2) in chamber 22 must be made lower than the oil pressure (p1) in chamber 20.

      In this connection, when the delivery pressure (p1) is high enough to generate a force on surface A3 of portion 32a capable of overcoming the elastic force of spring 36, piston 32 moves into the configuration shown by the continuous line in Figure 1, and in which rod 32c of piston 32 is located at opening 33, thus permitting  
10 oil flow from chamber 22 to conduit 34 and back into tank 24 along conduit 35.

Oil therefore also flows along conduit 28a and through dissipating device 29, so that the pressure (p2) in chamber 22 is lower than the delivery pressure (p1).

20       In other words, the pressure (p2) in chamber 22 is lower than and disassociated from the pressure (p1) in chamber 20, so that ring 13 can be moved in the direction of arrow F1 to establish a balanced eccentricity E value giving the desired oil flow to user  
25 device UT.

More specifically, as the delivery pressure (p1) increases and reaches a value (p\*) determined by the



characteristics of spring 36, piston 32 starts moving so that part of the oil leaks through opening 33. Valve 30 therefore also acts as a pressure dissipating member to assist in creating the desired pressure ( $p_2$ ) in chamber  
5 22.

At the end of the transient state, ( $p_1$ ) and ( $p^*$ ) are equal.

The control system has also proved stable.

That is, control continues as long as piston 32  
10 allows, i.e. control is taken over by valve 30, which is regulated exclusively by the delivery pressure ( $p_1$ ) and is unaffected by harmful internal forces.

Whereas in other control systems, the delivery pressure ( $p_1$ ) increases, remains constant for a while,  
15 and then decreases.

In the control system employed in the Figure 1 system 100, on the other hand, once the value required by user device UT is reached, pressure ( $p_1$ ) remains constant, even at high rotation speeds of rotor 14.

20 When the delivery pressure reaches the value of pressure ( $p^*$ ), substantially determined by the characteristics of spring 36, generation of pressure ( $p_2$ ) commences, and ring 13 begins moving in the direction of arrow F1 to reduce eccentricity E and,  
25 therefore, the displacement of pump 10. Consequently, the delivery pressure ( $p_1$ ) falls and tends to assume a value below ( $p^*$ ), so that piston 32 reduces opening 33

and moves into an intermediate balance position.

Displacement remains fixed up to a given pressure ( $p_1$ ) value, and, alongside an increase in engine speed, flow increases, and, on reaching a given pressure ( $p^*$ ) value, valve 30 starts to open, and oil begins flowing  
5 along conduit 34, through opening 33, and along conduit 35 to tank 24. The pressure ( $p_2$ ) in chamber 22 therefore falls below ( $p_1$ ), so that ring 13 moves in the direction of arrow F1 to reduce displacement and, therefore, oil  
10 flow to user device UT.

The present invention will now be described with reference to Figures 2-6.

Figure 2 substantially shows a system 100\*, which represents a variation of system 100 in Figure 1. In  
15 particular, changes have been made to pump 10, which, for the sake of simplicity, will now be referred to as pump 10\*.

Pump 10\* in Figure 2 differs from pump 10 in Figure 1 by projection 21 of pump 10\* having a nose 21a  
20 projecting inside oil-filled chamber 22.

Pump 10\* also comprises a conduit 40 connecting chamber 22 to inlet 23. Since inlet 23 is permanently at atmospheric pressure, conduit 40, when open, obviously sets chamber 22 to atmospheric pressure ( $p_o$ ).

25 Conduit 40 is fitted with a valve 41 operated by a sensor 42, which, on detecting a physical quantity, e.g. oil delivery temperature, opens/closes valve 41.

As opposed to operating valve 41 directly by sensor 42, the data detected by sensor 42 may be first reprocessed by an electronic central control unit 200, which controls opening/closing of valve 41.

5 For construction reasons, in the Figure 2-5 embodiment of the present invention, dissipater 29 is preferably replaced by a conduit 29\* formed on main body 11 and connecting chamber 22 to outlet 25. Hydraulically, however, and particularly as regards  
10 dissipation, conduit 29\* is obviously equivalent to dissipater 29.

Figures 2-5 show different operating configurations of pump 10\* of system 100\*, in which control is performed simultaneously by pressure and another  
15 parameter, e.g. oil temperature.

As explained in detail below, pressure control is continuous, whereas temperature control is performed in two stages.

Figure 2 shows the pump 10\* configuration, in which  
20 nose 21a is withdrawn from conduit 40, and the oil temperature  $T$  is below a reference value  $T^*$  established by the maker.

As such, valve 41 is open, and chamber 22, being connected, as stated, to inlet 23 by conduit 40, is at  
25 atmospheric pressure ( $p_o$ ).

Since the pressure ( $p_1$ ) in chamber 20 is higher than the pressure ( $p_o$ ) of the oil in chamber 22, ring 13

moves rapidly leftwards to rapidly reduce eccentricity E.

At this stage, there is no pressure adjustment.

Nose 21a continues moving leftwards and begins  
5 closing mouth 40a of conduit 40 (Figure 2). When mouth  
40a is closed completely by nose 21a (Figure 3),  
pressure control as described with reference to Figure 1  
may begin.

If oil temperature T is higher than value T\*,  
10 however, pressure should be controlled over the entire  
eccentricity E range. In this case, therefore, the  
control system closes valve 41 from the outset to  
immediately activate control as described with reference  
to Figure 1.

15 In other words, conduit 40 is closed either by the  
movement of ring 13 causing nose 21a to close mouth 40a  
of conduit 40, or by closure of valve 41 (controlled  
directly by sensor 42 or via electronic central control  
unit 200) when oil temperature T exceeds a set value T\*.

20 For a clearer understanding of the present  
invention, reference will now be made to Figure 6, which  
shows an example of control of pump 10\*.

As is known, a requisite of automotive internal  
combustion engines is low consumption at low engine  
25 speed (e.g. below 2000 rpm).

Another given is the fact that a lubricating  
circuit acts in the same way as a hydraulic conduit

containing the drive shaft, camshaft, etc.

Contrary to what might be thought, the oil flow necessary to maintain a constant pressure in the circuit does not depend to a great extent on the speed of the  
5 moving parts.

In Figure 6, curve (a) shows the minimum pressures permitting lubrication at engine speeds  $N$  regardless of temperature.

Assuming a target pressure, for example, of 4 bars,  
10 at which the control system is activated (activation pressure of spring 36), such a pressure requires a given oil flow, which mainly depends, not on engine speed, but on oil temperature.

Curve (b) shows the flow-engine speed test results  
15 relative to 140°C temperature and 4-bar pressure.

Curve (c) shows the flow-engine speed test results relative to 90°C temperature and 4-bar pressure.

In other words, curves (b) and (c) show the permeability of the hydraulic circuit at 140°C and 90°C  
20 respectively, to obtain a 4-bar pressure.

Over 5000 rpm, since curve (a) is at a constant 4-bar value, curves (b) and (c) coincide with curves (d) and (e) respectively.

Curves (d) and (e) show, as a function of engine  
25 speed at temperatures of 140°C and 90°C respectively, the flow necessary to obtain the minimum required pressure values (curve (a)).

For example, at 3000 rpm, to obtain 3 bars in curve (a), 35 l/min are required with a lubricating oil temperature of 140°C, and 20 l/min with a lubricating oil temperature of 90°C. This is due to the fact that an increase in temperature reduces viscosity and density, so that greater flow is required to achieve the same pressure (3 bars, in the above example).

An ideal pump 10\*, therefore, is one which, at 3.1 bar pressure and 3000 rpm, gives a flow of 35 l/min with an oil temperature of 140°C, and 20 l/min with an oil temperature of 90°C, etc. For accurate control, pump 10\* should therefore be electronically controlled. In the example shown, however, a non-electronically-controlled pump 10\* must suffice.

Using a variable-displacement pump 10\*, the slope of the characteristic curve of pump 10\* can be varied to adapt operation of the pump to the real flow demand of the control system.

The design point of pump 10\* is represented by point (A) (Figure 6), which is the point corresponding to the minimum flow  $Q$ , at a minimum engine speed ( $N_1$ ) and at maximum operating temperature (140°C in the example), ensuring acceptable lubrication of the hydraulic circuit, i.e. 1.5 bar pressure (curve (a)).

Moving along line (r1), i.e. if speed and flow are increased, a point (D) is reached, at which control commences at 90°C and at an engine speed  $N_2$ , in the

example, of around 1100 rpm.

Switching from line (r1) to line (r2), however, i.e. by varying the displacement of pump 10\*, control commences at point (C), i.e. at an engine speed N3 of  
5 around 2400 rpm, much higher than speed N2.

With a conventional control system not permitting a rapid change in displacement of pump 10\*, energy is therefore dissipated from point (D) onwards; whereas, with the control system according to the present  
10 invention, energy is dissipated from point (C) onwards, i.e. much later, with obvious advantages in terms of energy saving.

In other words, when a pump 10\* with the design point at point (A) operates at 90°C, control commences  
15 at point (D); whereas a pump 10\* capable of reducing its displacement and switching from line (r1) to line (r2) could operate at 90°C according to the characteristic curve through point (B), and, when operating at 90°C, would commence control at point (C), thus avoiding high-  
20 pressure operation (in the example shown, maximum 4-bar pressure) between point (C) and point (D). This characteristic of the control system is advantageous by optimizing consumption, as intended, at low speed.

The Figure 6 curves simply confirm what has already  
25 been stated, i.e. that line (r1) must approximate as closely as possible curve (d), and line (r2) must acceptably approximate curve (e), at least at

technically pertinent speeds (the most frequent speeds in the consumption/emission evaluation cycle), i.e. between 1000 and 2000 rpm. It is therefore vital that, in accordance with the teachings of the present invention, displacement of pump 10\* be variable rapidly to move ring 13 leftwards as fast as possible and independently of operating pressure. Which variation in displacement translates, as stated, in a rapid switch in operation of pump 10\* as shown by line (r1) to operation as shown by line (r2) (Figure 6).



## CLAIMS

1) A pumping system (100\*) comprising a pump (10\*) and a user device (UT) connected to said pump (10\*) by a delivery conduit (26), and further comprising pressure control means for setting said pump (10\*) to a balanced configuration to supply the oil flow demanded by said user device (UT);

a pumping system (100\*) wherein said pressure control means comprise hydraulic dissipating means (29\*, 30) for imparting to the oil in a control chamber (22), forming part of said pump (10\*), a pressure (p2) lower than a control pressure (p1);

the pumping system (100\*) being characterized in that said control chamber (22) of said pump (10\*) comprises a channel (40) connecting the control chamber to an inlet (23).

2) A pumping system (100\*) as claimed in Claim 1, wherein a member (13) of said pump (10\*) comprises means (21a) for selectively closing said channel (40).

3) A pumping system (100\*) as claimed in Claim 2, wherein said channel (40) comprises opening/closing means (41, 42, 200) controlled selectively by an operating parameter.

4) A pumping system (100\*) as claimed in Claim 3, wherein said operating parameter is the temperature of the oil pumped by said pump (10\*).

## ABSTRACT

A pumping system having a pump, such as a variable-displacement vane pump or a gear pump. The pump in turn  
5 has hydraulic pressure-control dissipating devices for imparting to the oil in a first control chamber a pressure lower than the pressure of a second chamber. The system is characterized in that the first control chamber of the pump has a channel connecting the first  
10 control chamber to an oil inlet. And the channel has an opening/closing device controlled selectively by an engine operating parameter, such as oil temperature.

Figure 2

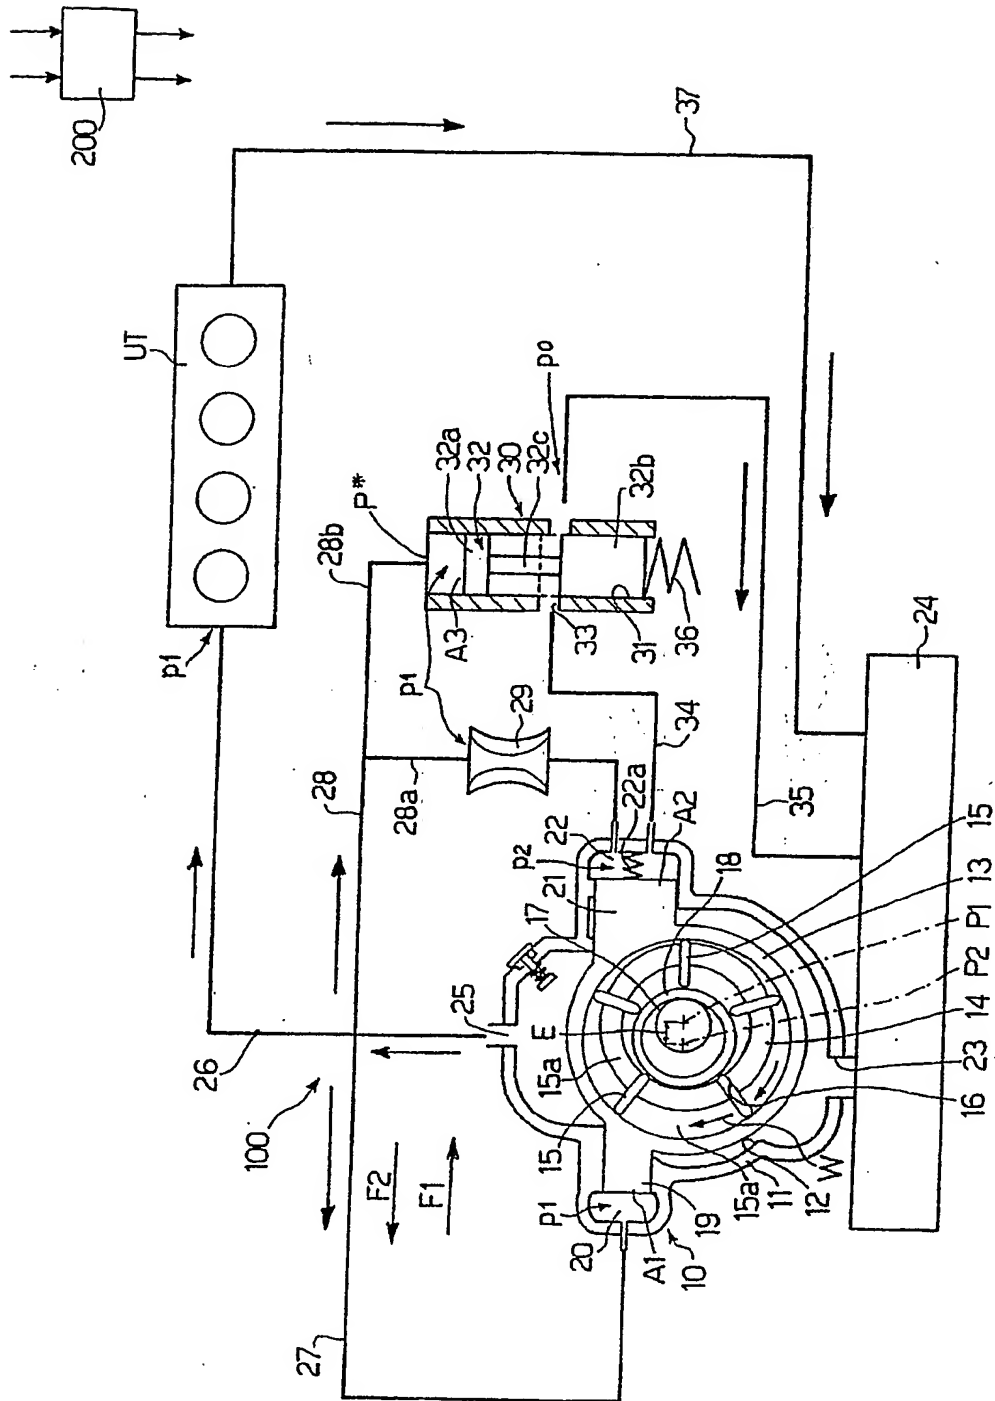


Fig.1

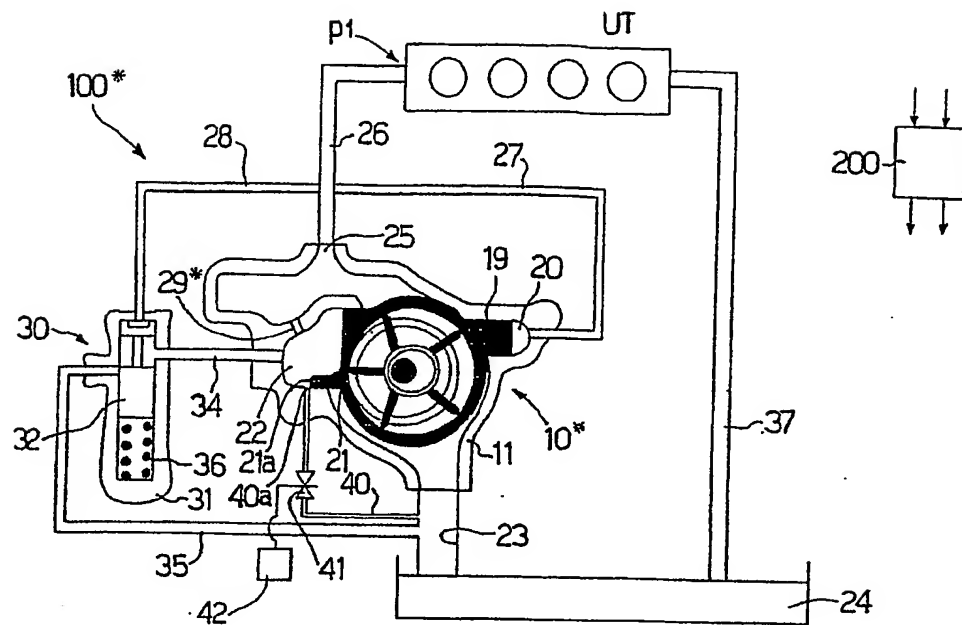


Fig.2

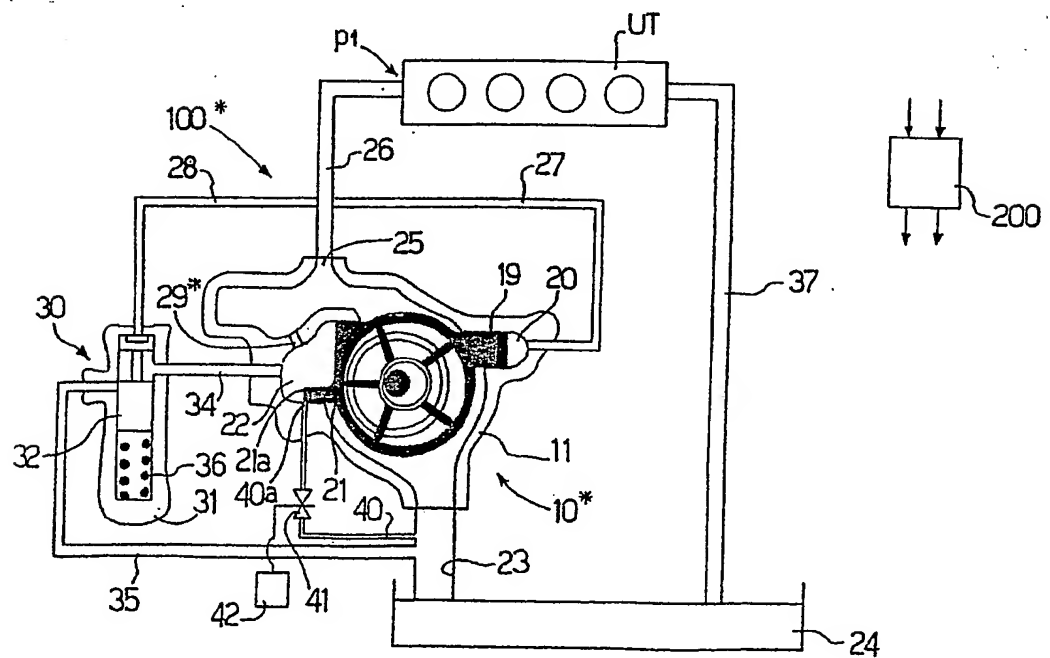


Fig.3

3 / 4

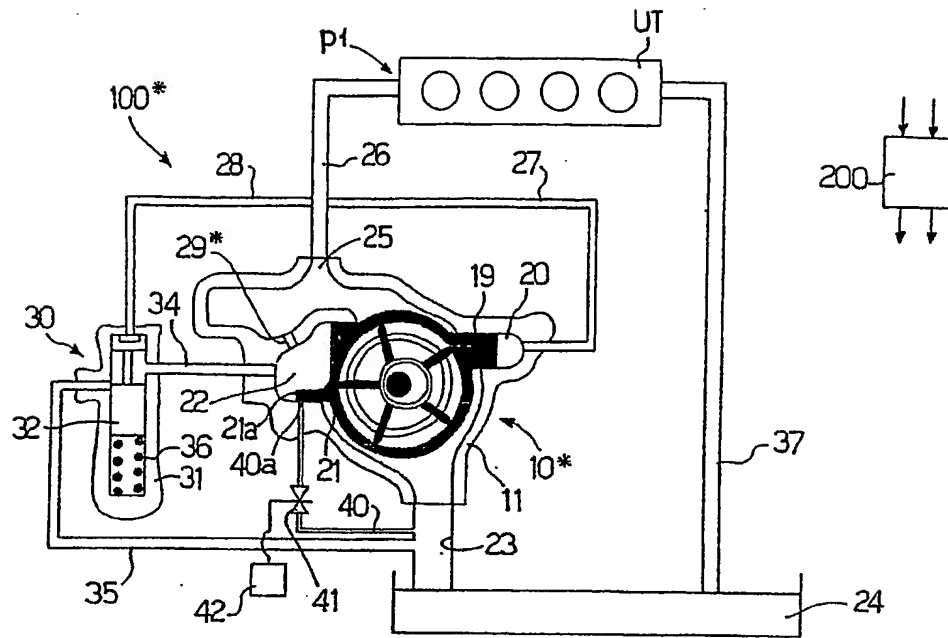


Fig.4

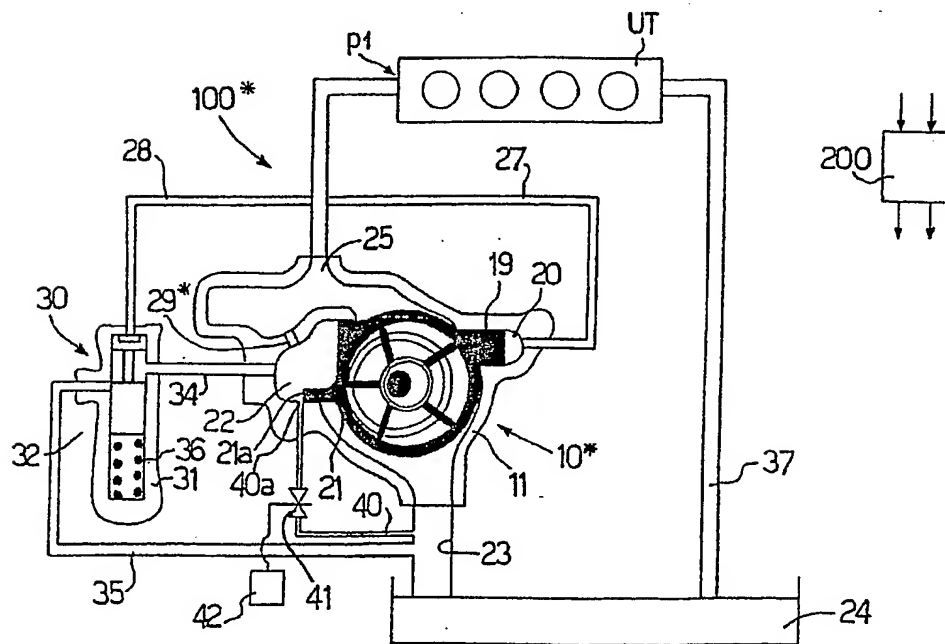


Fig.5

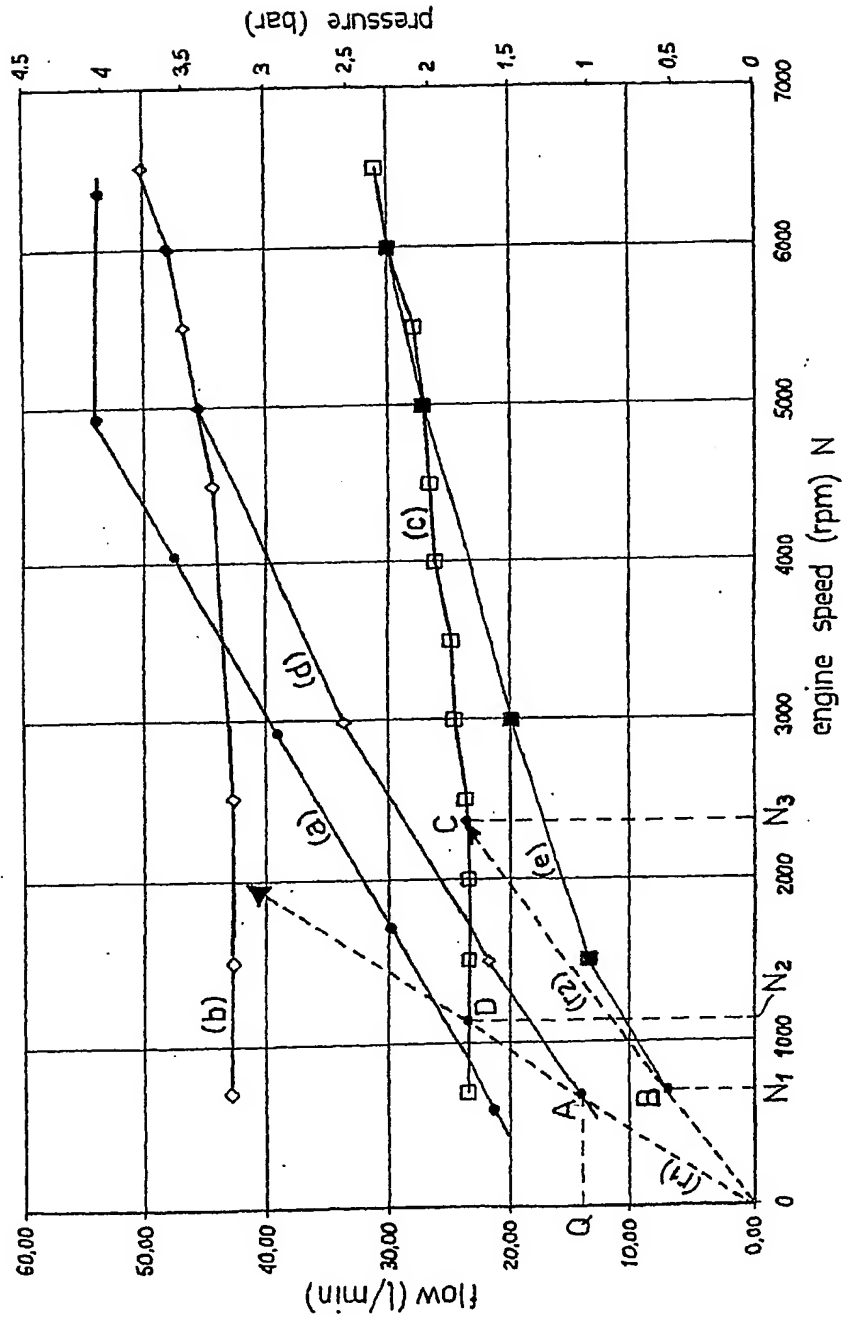


Fig.6

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2005/050037

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F04C2/344 F04C15/04

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 195 271 A (RENAULT ET PEUGEOT, FR) 1 March 1974 (1974-03-01)	1-3
Y	page 2, line 39 - page 4, line 8; figures 1,2	4
X	US 4 510 962 A (MOTT ET AL) 16 April 1985 (1985-04-16) column 2, line 28 - column 3, line 15; figure 1 column 4, line 13 - line 15	1-3
Y	US 5 800 131 A (LEHMANN ET AL) 1 September 1998 (1998-09-01) cited in the application abstract; figures 4-7	4
A	US 2003/031567 A1 (HUNTER DOUGLAS G ET AL) 13 February 2003 (2003-02-13) abstract; figures 3,4	1-4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

6 April 2005

Date of mailing of the international search report

12/04/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Descoubes, P

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/050037

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2195271	A	01-03-1974	FR 2195271 A5 DE 2307218 A1	01-03-1974 14-02-1974
US 4510962	A	16-04-1985	EP 0188044 A1 AU 571633 B2 AU 3771385 A	23-07-1986 21-04-1988 24-07-1986
US 5800131	A	01-09-1998	DE 4302610 A1 BR 9406194 A CN 1117307 A ,C WO 9417308 A1 EP 0681656 A1 ES 2117251 T3 JP 8505919 T	04-08-1994 12-12-1995 21-02-1996 04-08-1994 15-11-1995 01-08-1998 25-06-1996
US 2003031567	A1	13-02-2003	US 2002114708 A1 DE 10231197 A1 JP 2003201976 A DE 10161131 A1 JP 2002349449 A	22-08-2002 27-02-2003 18-07-2003 20-03-2003 04-12-2002